


CORROSION RESISTANT INSULATED DOOR

MODEL CESD20CR




MEASURE THE WIDTH AND HEIGHT OF THE OPENING

STAINLESS STEEL

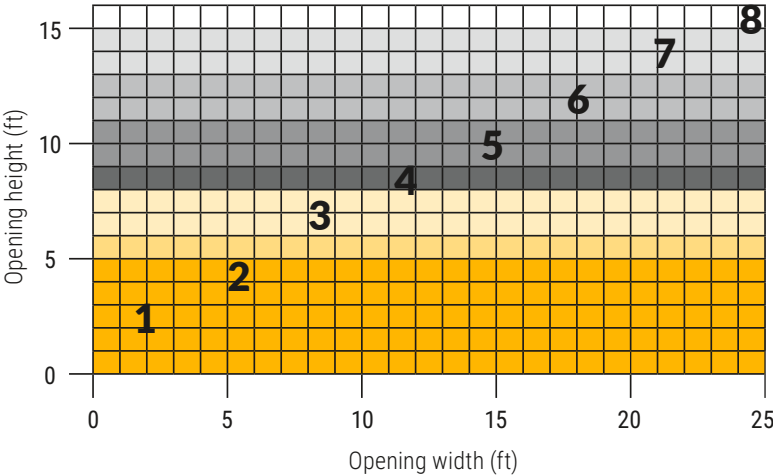


Dimensions (in)	1	15	17	8	8
	2	16	18	8	8
	3	17	19	8	8
	4	18	20	8	8
	5	19	21	8	8
	6	20	22	8	8
	7	21	23	8	8
	8	22	24	8	8
	Zone	A	B	C	D

ALUMINUM

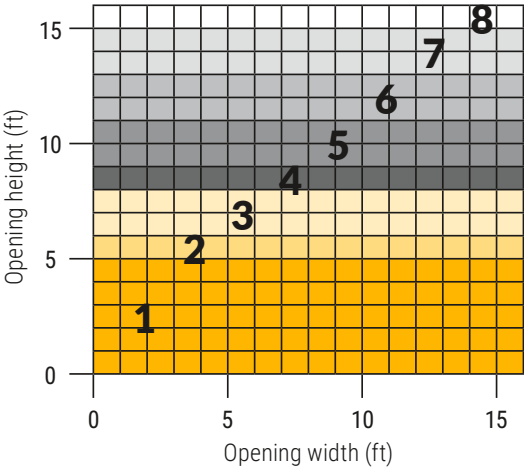


Dimensions (in)	1	15	17	7	7
	2	16	18	7	7
	3	17	19	7	7
	4	18	20	7	7
	5	19	21	7	7
	6	20	22	7	7
	7	21	23	7	7
	8	22	24	7	7
	Zone	A	B	C	D

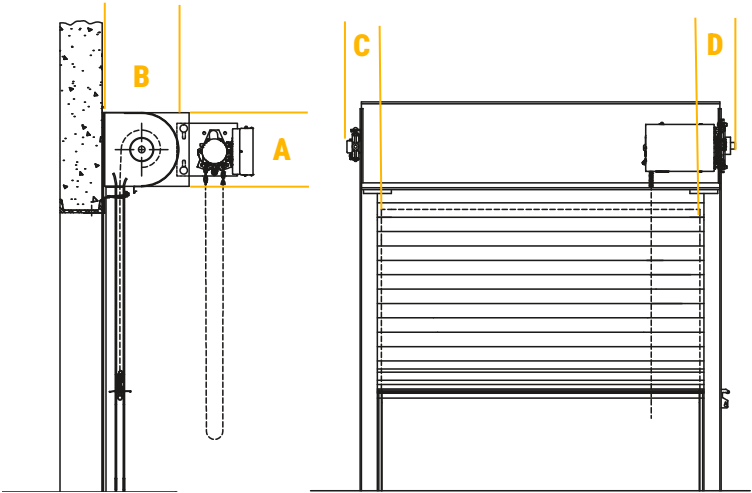


The dimensions featured on this sheet are provided as a guide.

GUIDE CONSTRUCTION OPTIONS

E GUIDE

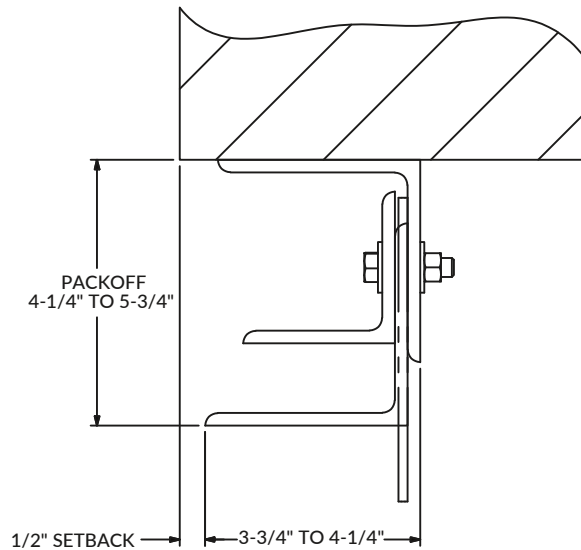


Z GUIDE

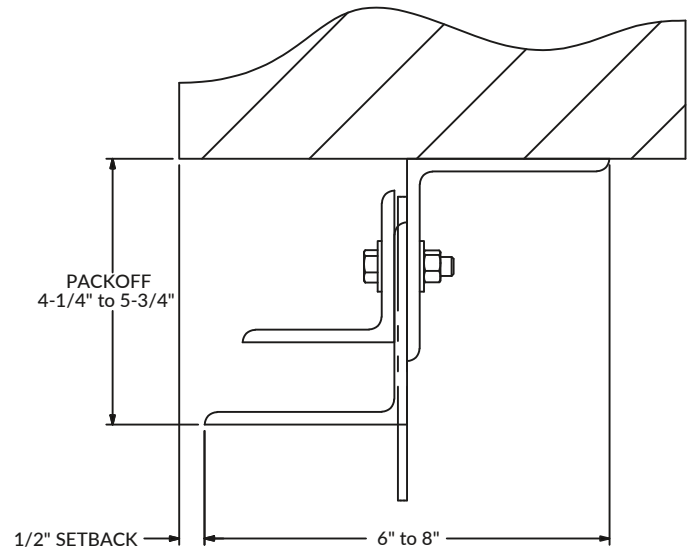


CURTAIN DESIGN

Insulated Slat

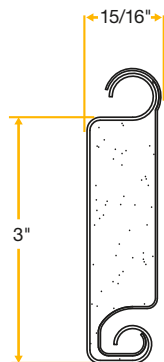

LINTEL SEAL BRUSH

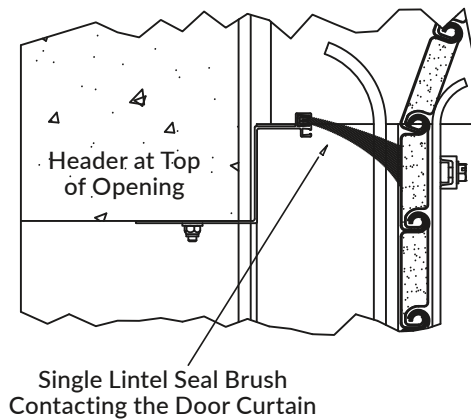

R-Value of 8.0

U-Value of .125

Calculated using
the ASHRAE Handbook
of Fundamentals

The dimensions featured on this sheet are provided as a guide.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2025 Clopay Corporation. All rights reserved.

CMDC-CRIROLLINGTD-23_REV0525