
EXTREME® 1024

MODELS CEPD1024, CEPI1024 (INSULATED)


EXTREME SERIES

MEASURE THE WIDTH AND HEIGHT OF THE OPENING

NON-INSULATED DOOR SIZE AND AREA

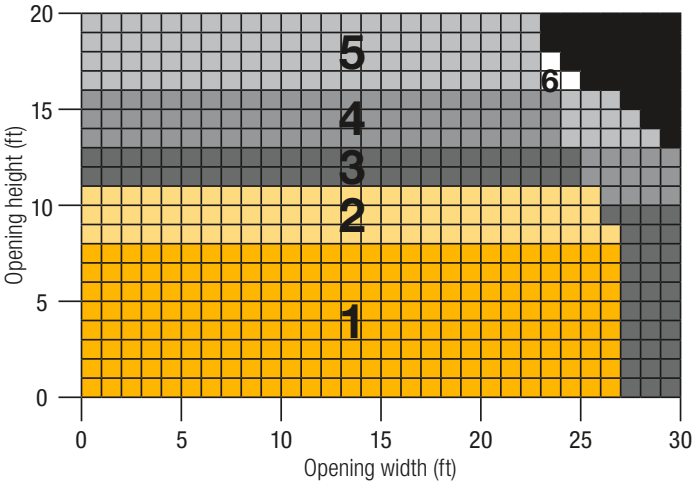

INSULATED DOOR SIZE AND AREA

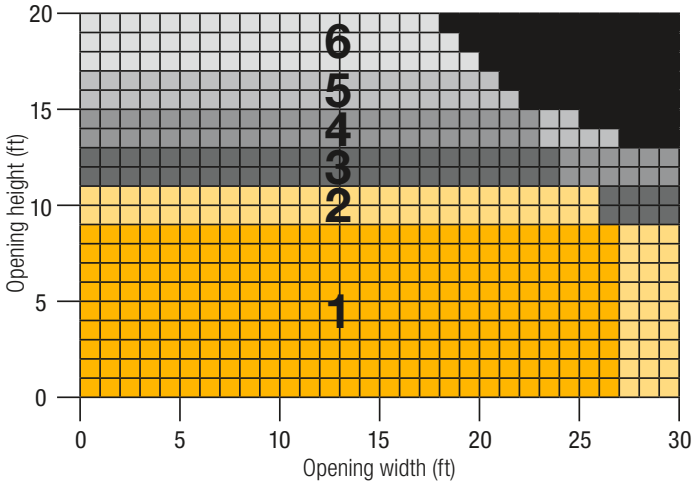

COMPONENT DIMENSIONS

Reference the zone number to view component dimensions for tube motorized doors.

Dimensions (in)

Zone	A	B	C	D
1	19	19	9	14
2	20	20	9	14
3	21	21	9	15
4	22	22	9	15
5	23	23	9	16
6	24	24	9	16


COMPONENT DIMENSIONS

Reference the zone number to view component dimensions for tube motorized doors.

Dimensions (in)

Zone	A	B	C	D
1	20	21	10	14
2	22	23	10	14
3	24	25	10	15
4	26	27	10	15
5	27	27	9	16
6	28	28	9	16

Maximum width for 1024 door is 30'.

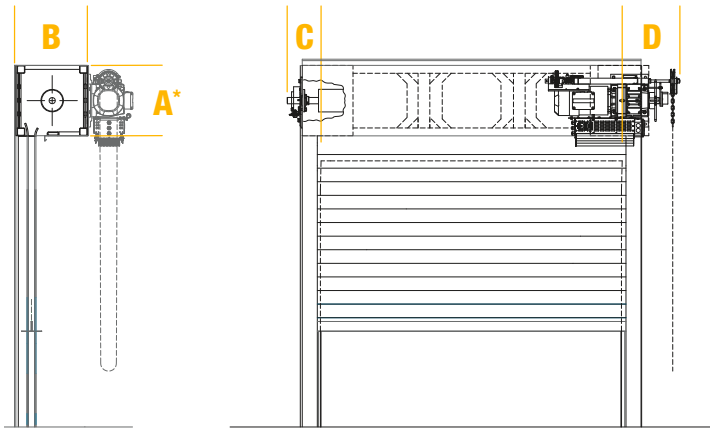


The dimensions featured on this sheet are provided as a guide.

*On smaller coil doors, the operator may exceed the bottom of dimension A. This will not interfere with the door opening.


GUIDE CONSTRUCTION OPTIONS

SERVICE DOOR


E GUIDE

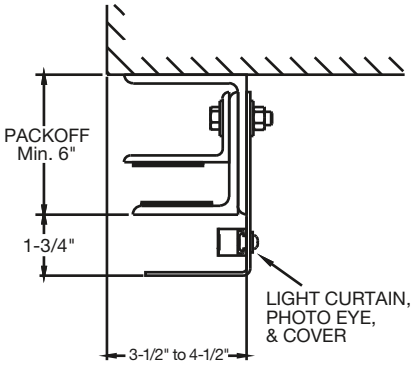

Z GUIDE

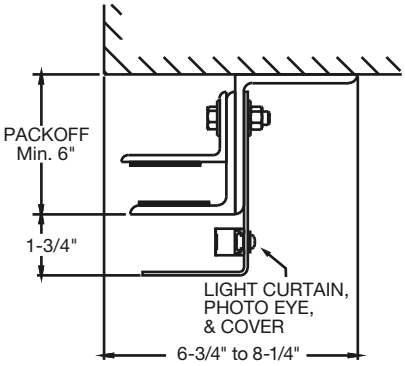


BETWEEN JAMBS

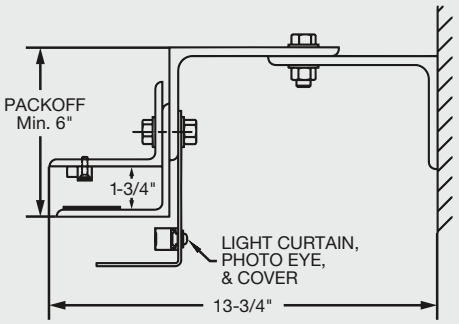


INSULATED DOOR


E GUIDE

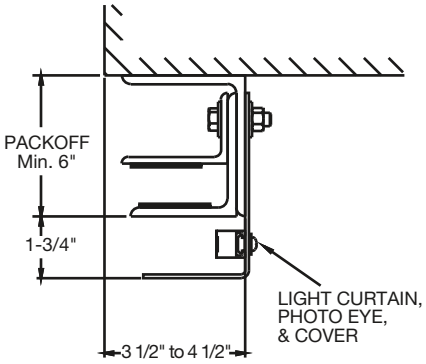

Z GUIDE

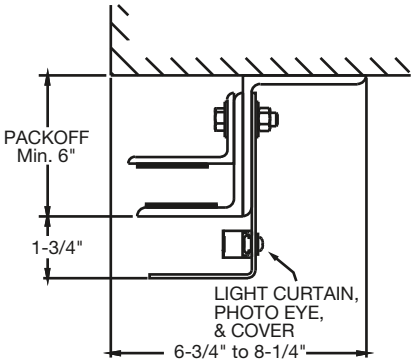

BOTTOM BAR



The dimensions featured on this sheet are provided as a guide.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at **www.architectdoorhelp.com**.

©2025 Clopay Corporation. All rights reserved.