


STEELWEAVE™ METAL MESH GRILLE

MODEL CEAG 10S – SERVICE




MEASURE THE WIDTH AND HEIGHT OF THE OPENING

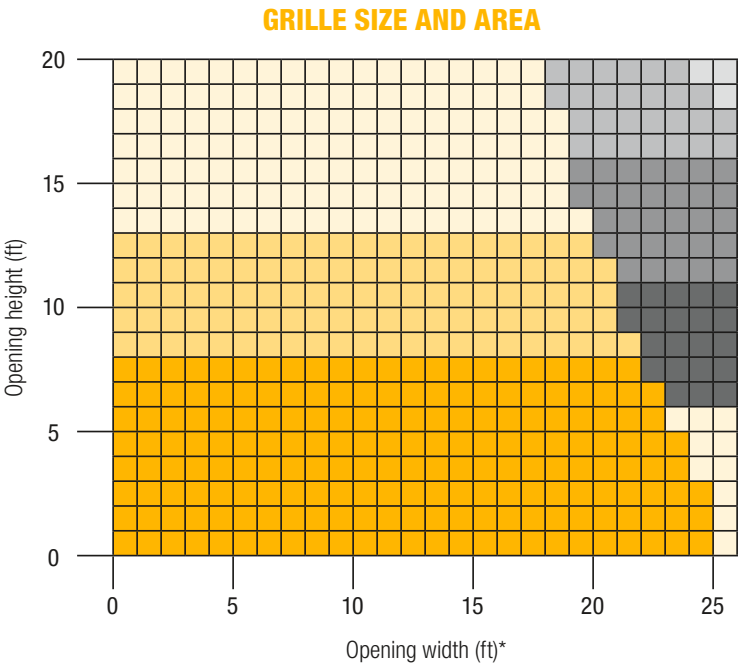

COMPONENT DIMENSIONS

	A	B	C	D	E
Dimensions (in)	8.5	12.5	5-5/8	5-5/8	2-5/16
	9.5	12.5			
	10.5	12.5			
	11.5	13			
	12.5	14			
	13.5	15			
	14.5	16			

*Lago curtain widths larger than 19 feet may require additional lead time and cost.

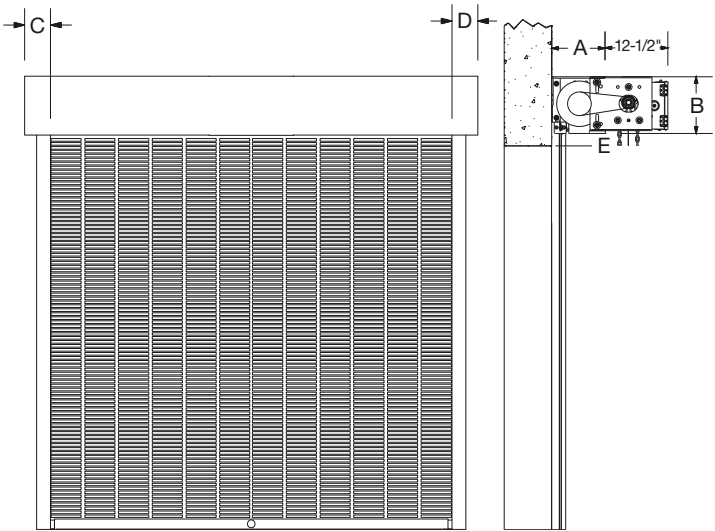

STANDARD PATTERNS



Tigris



Lago

The dimensions on this sheet are provided as a guide for the Tigris curtain. The dimensions for the Lago curtain may be slightly smaller.


ROLLING GRILLES

STEELWEAVE™ METAL MESH GRILLE

GUIDE CONSTRUCTION OPTIONS

FACE OF WALL


Typical masonry wall construction.

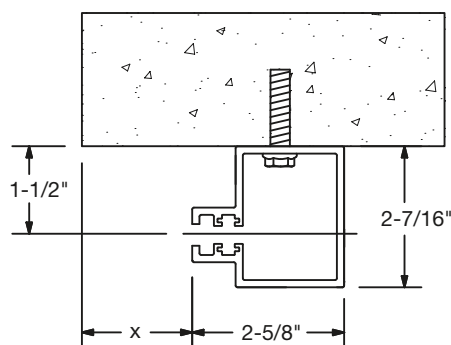

x = setback. Typically 1/2", may be more based on wind load requirements.


FACE OF WALL

Typical steel jambs.

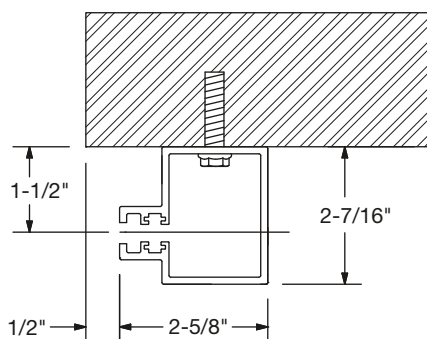


FACE OF WALL WITH TUBES

Used when there is uneven or insufficient wall structure. Guides are mounted to the tubes, which are attached to floor and overhead structure.

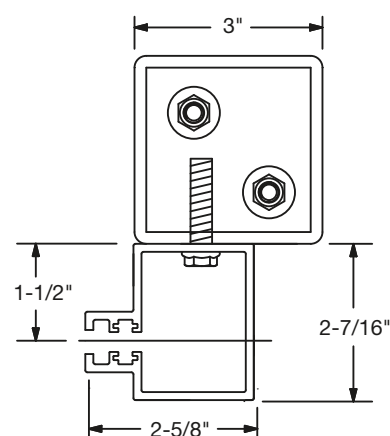


BETWEEN JAMBS WITH 3" TUBES

Used when wall structure is uneven or insufficient. Guides are mounted to the tubes, which are attached to floor and overhead structure.

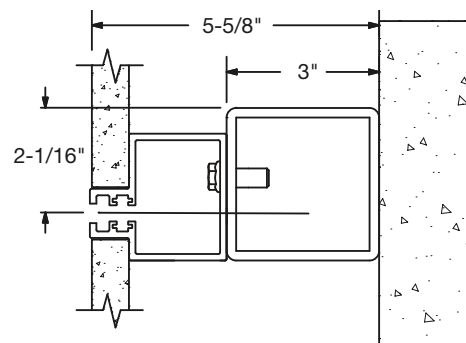


BETWEEN JAMBS WITH 2" TUBES

Used when wall structure is uneven or insufficient with limited space. Guides are mounted to the tubes, which are attached to floor and overhead structure.

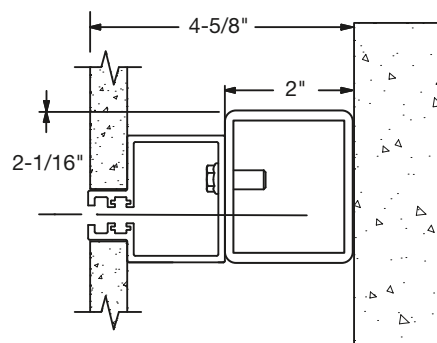

BOTTOM BAR

Aluminum

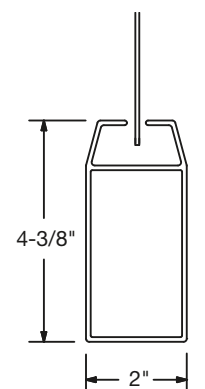

Locking available.

For recessed applications where the coil is above the ceiling, it is important to provide full coil access for repair or replacement of the motor and door components.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.

CMDC-STEELWEAVESERVICETD-23_REV0924