


STOREDEFENDER™ DOOR

MODELS CPSD10, CPSD20 (INSULATED)



MEASURE THE WIDTH AND HEIGHT OF THE OPENING


DOOR SIZE AND AREA

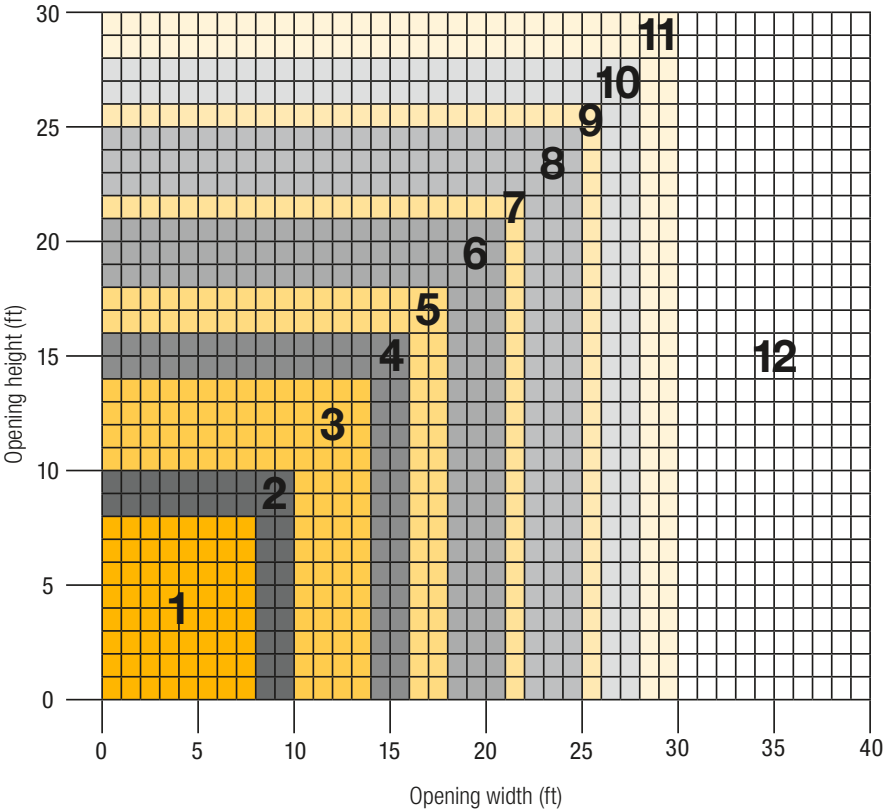


COMPONENT DIMENSIONS

Reference the zone number to view component dimensions for tube motorized doors.

1	14	16	5	7
2	15	17	5	7
3	16	18	5	7
4	17	19	5	9
5	18	20	5	9
6	19	21	5	9
7	20	22	7	9
8	21	23	7	9
9	22	24	7	11
10	23	25	7	11
11	24	26	7	11
12	25	27	9	13
Zone	A	B	C	D

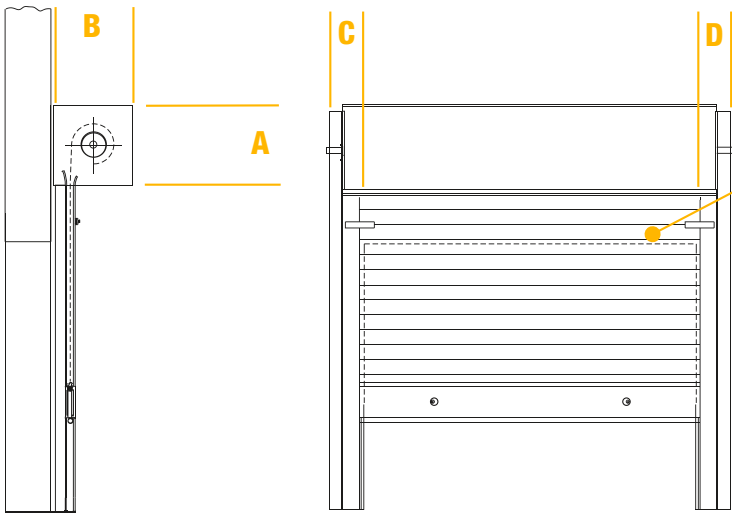

CURTAIN SLAT DESIGN

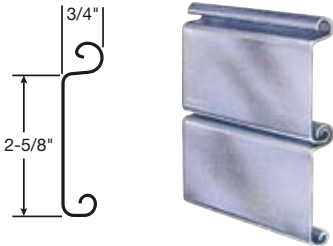


The dimensions featured on this sheet are provided as a guide.

GUIDE CONSTRUCTION OPTIONS


E GUIDE

Typically used with steel jamb.

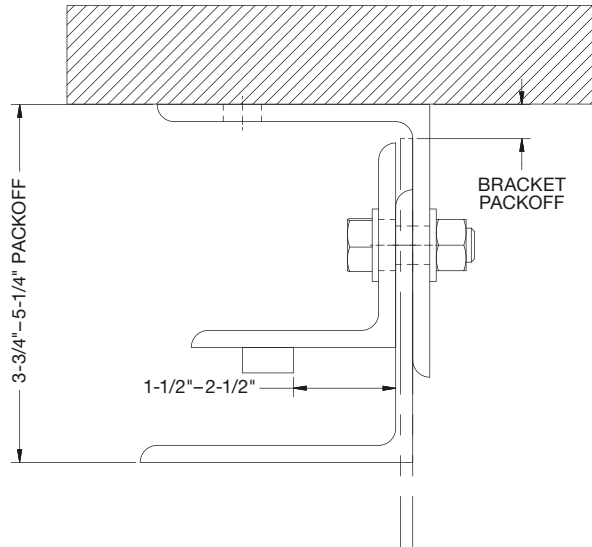


Z GUIDE

Typically used with masonry wall construction.

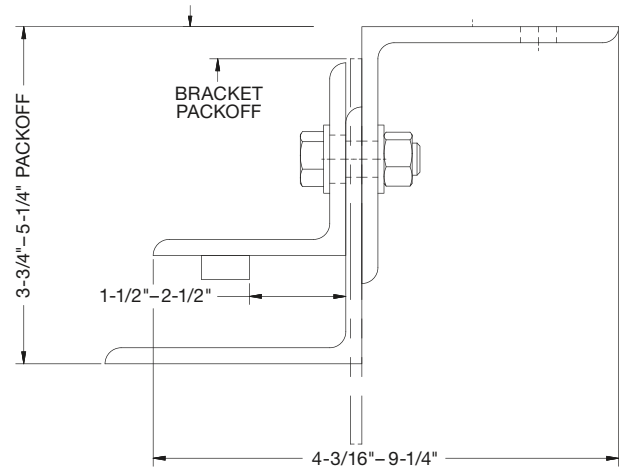


BETWEEN JAMBS

Most common for doors with chain/crank/motor operation.

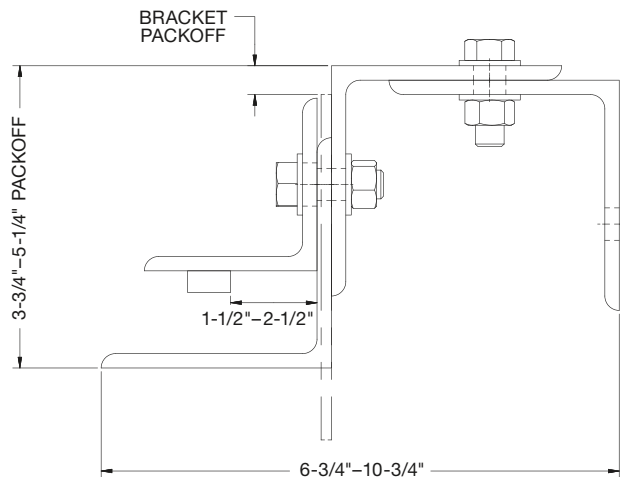

BOTTOM BAR

Robust 6" tall aluminum bottom bar in mill or powder coated finish.

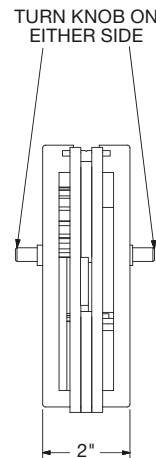

Remember, three main factors when choosing a guide assembly are:

1. Wall construction
2. Operation
3. Side clearance

The dimensions featured on this sheet are provided as a guide.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.

