

INSULATED ROLLING DOOR

THERMISER MAX[®] DOOR

CLOPAY COMMERCIAL – MODEL CESD30



Model CESD30 Door

TODAY'S MOST ENERGY EFFICIENT ROLLING DOOR

PERFORMANCE...TESTED AND PROVEN

Thermiser Max is built to order and best used in exterior openings where maintaining environmental separation on each side of the door is necessary. Doors meet ASHRAE 90.1*, 2015 IECC[®] and California's Title 24 air infiltration requirements with an independently tested** value of less than 0.3 CFM/ft². They can also be configured to meet a maximum operational wind load of 20 PSF.

PATENTED SEALING SYSTEM

This exclusive full perimeter seal, combined with thermally broken guide construction and insulated curtains, minimizes air infiltration and thermal transference.

clopaycommercial.com

A GREEN, ENERGY EFFICIENT OPTION

This door delivers a 94% decrease in air infiltration compared to standard products† and can contribute up to 38 credits in five LEED categories. A comprehensive LEED package is available on our website.

REDUCES SOUND TRANSMISSION

Sound Transmission Class (STC) rating is up to 30 for the entire assembly. If an STC of 32 is desired, additional options are required. Please consult the factory for details. All configurations are evaluated per ASTM E90, based on testing a complete, operable assembly.

**Requires face-of-wall mounting*

***Test results available upon request*

†Calculated using data from an ASHRAE research report for standard coiling doors.

STANDARD COMPONENT MATERIALS AND FINISHES

- 1. BRACKETS** – Steel with powder coated finish to match curtain. Bolt to guide assembly and support counter-balance shaft and curtain.
- 2. COUNTER-BALANCE SHAFT** – Steel supports curtain and contains torsion springs for assisting operation.
- 3. HOOD** – Galvanized steel with GalvaNex™ polyester enamel finish to match curtain. Encloses the curtain and provides weather resistance at the head of the door.
- 4. CURTAIN** – Galvanized steel with GalvaNex™ polyester enamel finish in Gray, Tan, White, Brown or Black. Flame Spread Index of 0 and a Smoke Developed Index of 10 as tested per ASTM E84. The slat has an R-value of 8.0 as calculated using the ASHRAE Handbook of Fundamentals.
- 5. GUIDES** – Thermally broken structural steel guides with powder coating to match the curtain. Angle assemblies bolt to the wall and support the weight of the door.
- 6. BOTTOM BAR** – If width is less than 24'5", extruded aluminum supplied in mill finish. If width is greater than 24'5", steel supplied with powder coating to match curtain.

OPTIONAL MATERIALS AND FINISHES


- Aluminum in mill, clear and color anodized
- Stainless steel 300 series in #4 finish
- 316 stainless steel in #4 finish
- SpectraShield® powder coating in more than 180 colors
- For a more durable finish, consider upgrading to our GalvaNex™ Ultra™ or SpectraShield® Ultra™ powder coat finish.
 - It is a polyester-based, textured, wear-resistant clear coat that provides increased resistance to corrosion of the curtain and improved durability against normal abrasion and scratching due to cycling.

Brackets, Guides and Bottom Bar

- Hot-dip galvanizing on steel components
- Zinc-enriched, corrosion-resistant powder coating in Gray

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.

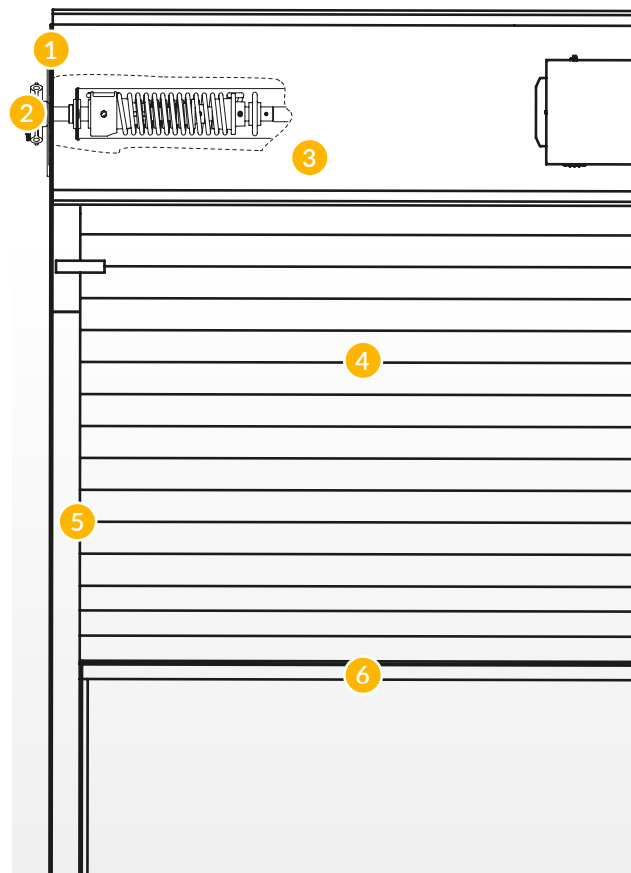

OPERATION AND STRUCTURAL REQUIREMENTS

Hand-crank, push-up and a variety of motor options are available

This product is supported by a guide assembly attached to the jamb construction. No additional header support is required unless hood supports are mandated by a larger opening width.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.

