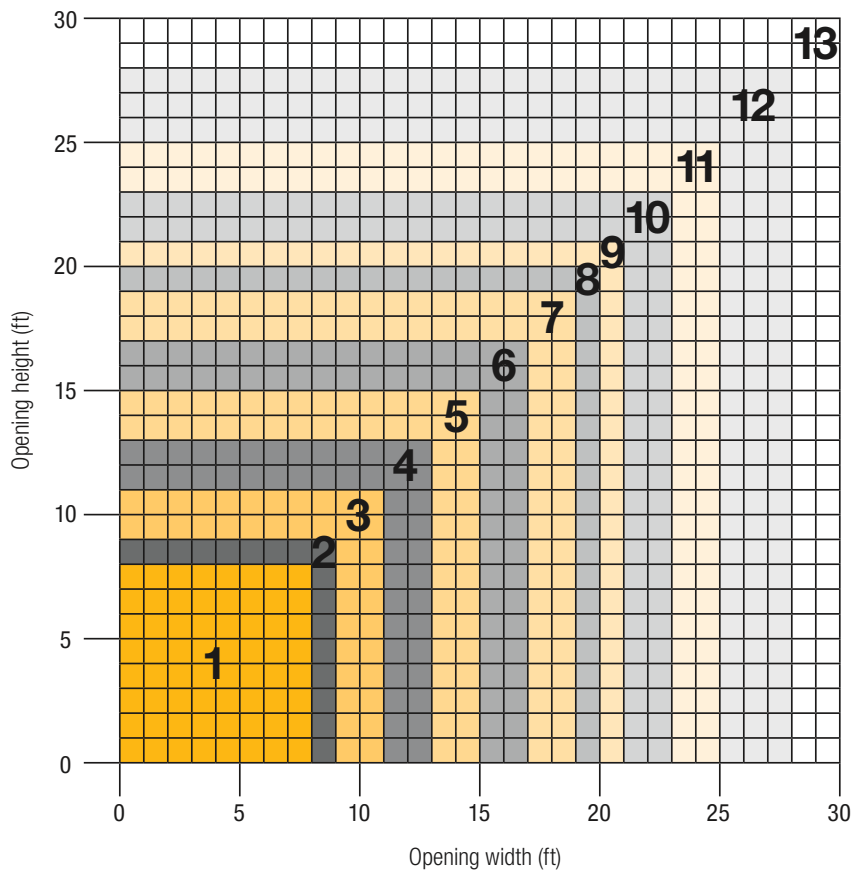



THERMISER MAX®

MODEL CESD30

**MEASURE THE WIDTH AND HEIGHT OF THE OPENING****DOOR SIZE AND AREA****COMPONENT DIMENSIONS**

Reference the zone number to view component dimensions for tube motorized doors.

Zone	A	B	C	D
1	17	19	5	9
2	18	20	5	9
3	19	21	5	9
4	20	22	7	9
5	21	23	7	11
6	22	24	7	11
7	23	25	7	11
8	24	26	7	11
9	25	27	7	11
10	26	28	7	11
11	27	29	7	11
12	29	31	7	11
13	31	33	7	11

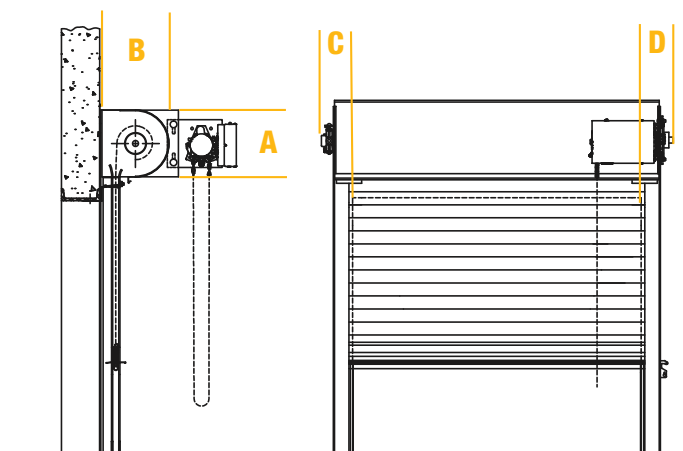

The dimensions featured on this sheet are provided as a guide.

Sound Transmission Class (STC) ratings are available for a variety of Themiser Max® door configurations.

*If an STC of 32 is desired, additional options are required. Please contact the factory for details. All configurations are evaluated per ASTM E90, based on testing a complete operable assembly.

Gauge	STC Rating
22/22 or 18/24	27
18/24	30
18/24	32*


INSULATED ROLLING DOOR

THERMISER MAX®

GUIDE CONSTRUCTION OPTIONS


FACE OF WALL Z

Typically used with masonry wall construction, guides are mounted to the interior side of the wall.

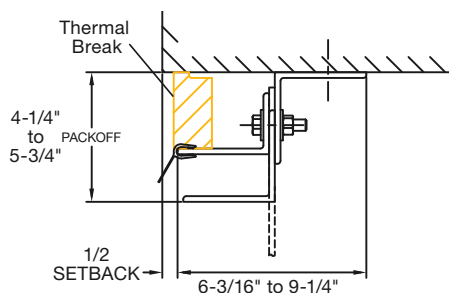


FACE OF WALL E

Typically used with steel jambs, guides are mounted to the interior side of the wall.

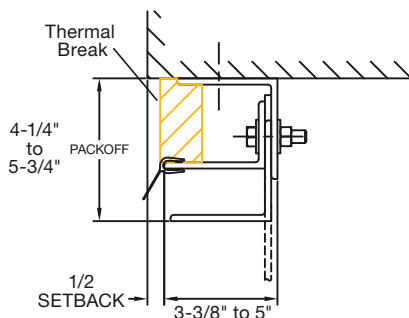


BETWEEN JAMBS

Used when side clearance is minimal, guides are mounted to the inside of the jamb.

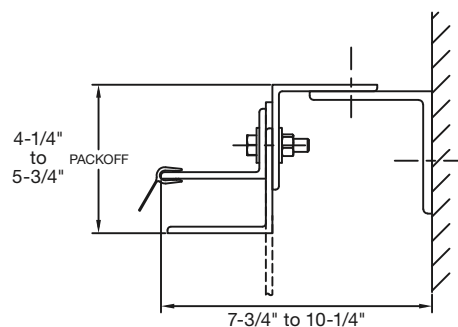


CURTAIN DESIGN


Insulated Slat

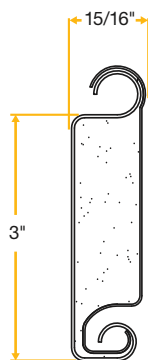

LINTEL SEAL BRUSH

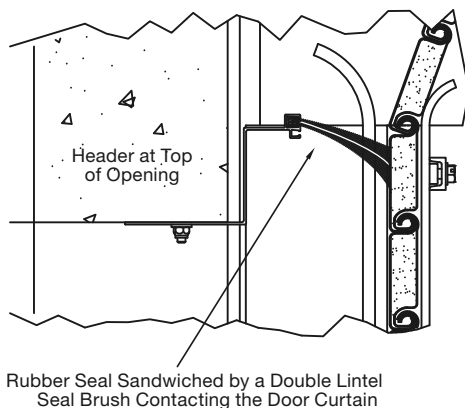

FOAM BLOCK

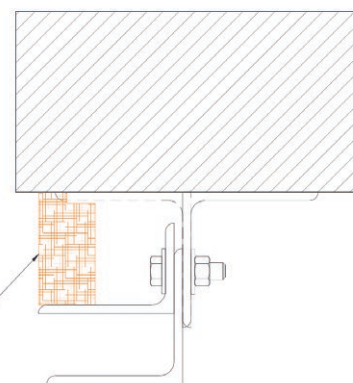

Air Infiltration value of less than .3 CFM/FT².

R-value of 8.0

U-value of .125

Calculated using the ASHRAE Handbook of Fundamentals

The dimensions featured on this sheet are provided as a guide.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.

CMDC-THERMISERMAXTD-23_REV0924