

HIGH-LIFT TRACK

- ☐ 5° BREAKAWAY (HI-LIFT AVAILABLE IN 3" INCREMENTS)
- ☐ STRAIGHT INCLINE (OPTIONAL) *

* STRAIGHT INCLINE TRACK LIMITATIONS:

DOOR HEIGHT	MAX. HI-LIFT
THRU 14'0"	54"
@ 15'0"	43"
@ 16'0"	31"

HEADROOM REQUIREMENTS:

MIN. HEADROOM = HI-LIFT + 12"
4" ADDITIONAL HEADROOM REQUIRED FOR TROLLEY OPERATOR
12" ADDITIONAL HEADROOM REQUIRED FOR DOUBLE SHAFT

MAX. AVAILABLE HI-LIFT:

(BREAKAWAY TRACK)
MAXIMUM HI-LIFT = FLOOR TO CEILING - (DOOR HEIGHT + 12")

HI-LIFT MAY NOT EXCEED DOOR HEIGHT - 24"
OR EXCEED 162" (13'6")

NOTE:

SPRING SIZE AND CONFIGURATION INDIVIDUALLY CALCULATED TO COUNTERBALANCE DOOR LOAD. AN EXACT SPRING LAYOUT CAN BE FURNISHED UPON APPROVAL OF BID. SOME DOORS MAY REQUIRE 6" SPRINGS OR DOUBLE SHAFTS.

INTERMEDIATE HORIZONTAL TRACK SUPPORT: (BY INSTALLER)

- ☐ NO - (HORIZONTAL TRACK LENGTH UP TO 13'0")
- ☐ YES - (HORIZONTAL TRACK LENGTH OVER 13'0")

REAR HANGER: (SUPPLIED BY INSTALLER)

HORIZONTAL ANGLE: 13 GA. MIN.

HORIZONTAL TRACK:

- ☐ 14 GA. MIN. 2" TRACK
- ☐ 12 GA. 3" TRACK


RADIUS: 15" R.

SPRING BUMPER:

BACK ROOM
DOOR HEIGHT + 35" - HI-LIFT (2" TRACK)
DOOR HEIGHT + 38" - HI-LIFT (3" TRACK)

VERTICAL TRACK:

- ☐ 16 GA. MIN. 2" TRACK
- ☐ 12 GA. 3" TRACK

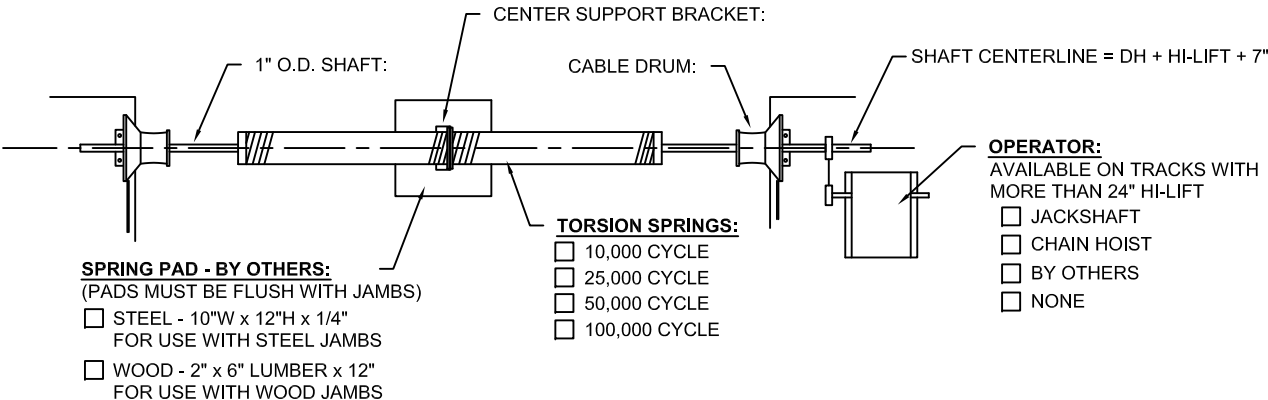

OPERATOR:

AVAILABLE ON TRACKS WITH MORE THAN 24" HI-LIFT

- ☐ JACKSHAFT
- ☐ CHAIN HOIST
- ☐ BY OTHERS
- ☐ NONE



CUST:	HIGH LIFT	TRACK SIZE:	OPERATOR MODEL #:	OVERHEAD CLEARANCE:	SHEET 'T-5'
JOB:			OPERATOR BACKROOM:	AVAILABLE HEADROOM:	
ARCH:	OPENING SIZE: ' " W x ' " H		BACK ROOM:	HEADROOM REQUIREMENT:	
CONT:	DOOR SIZE: ' " W x ' " H				
				DATE:	
				BID #:	
				PAGE of	