

FIRE RATED COUNTER DOOR


MODELS CERC10, CERC11 (SMOKESHIELD®)



MEASURE THE WIDTH AND HEIGHT OF THE OPENING

DOOR SIZE AND AREA*

The maximum limits listed in our UL procedure are for counter fire shutters up to 16'0" wide, 10'0" high or a 120 sq ft maximum.
If the counter shutter is over 12' wide the limit is 7'6" high.

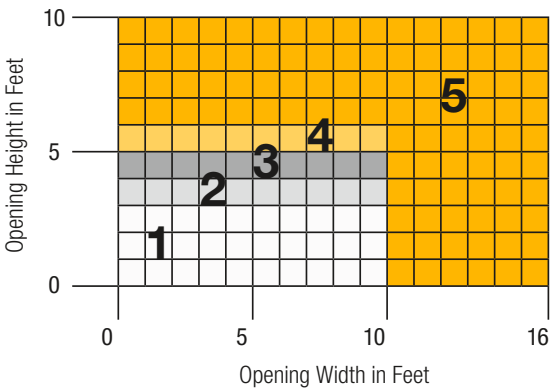


*Chart based on 22 gauge steel slats.


COMPONENT DIMENSIONS

Reference the zone number to view component dimensions for in tube hand crank and tube motor-operated units. Alternate operation methods increase headroom and sideroom requirements. Upset (zone E) is calculated with a single angle bottom bar. Sensing edges add 1" of upset. Tubular bottom bars add 2.25" of upset.


Dimensions in inches	1	8.5	8	2	1.75	.25
	2	9	8.5	2	1.75	.25
	3	9.5	9	2	1.75	.25
	4	10	9.5	2	1.75	.25
	5	10.5-14.5	10-14	2	1.75	.25
Zone	A	B	C	D	E	

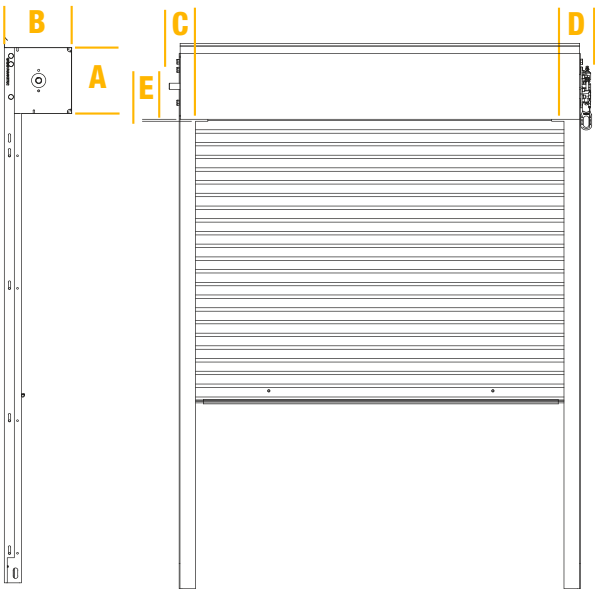


SLAT DESIGN



ANGLE BOTTOM BAR



TUBULAR BOTTOM BAR

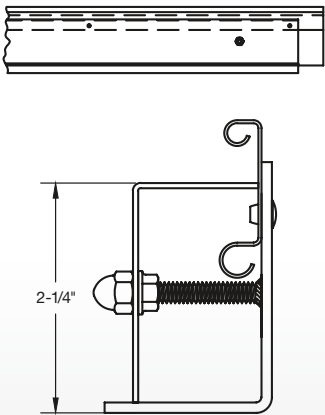

The details and dimensions on this sheet are provided as a rough guide for planning purposes.


FIRE PROTECTIVE CLOSURE

FIRE RATED COUNTER DOOR

GUIDE CONSTRUCTION OPTIONS


3" SHAFT FACE OF WALL

Guides are mounted to the interior or exterior side of the wall.

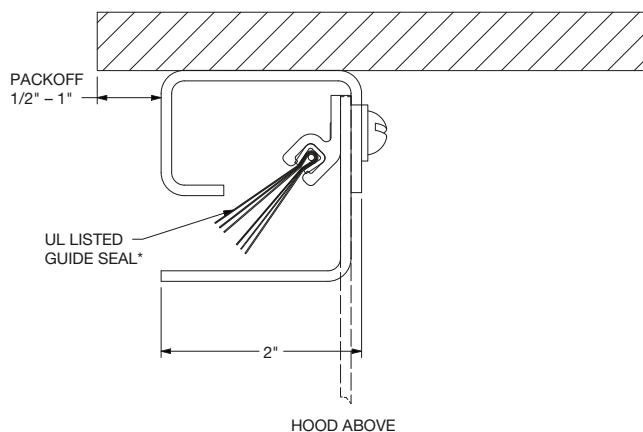


3" SHAFT BETWEEN JAMBS

Guides are mounted to the inside of the jamb.

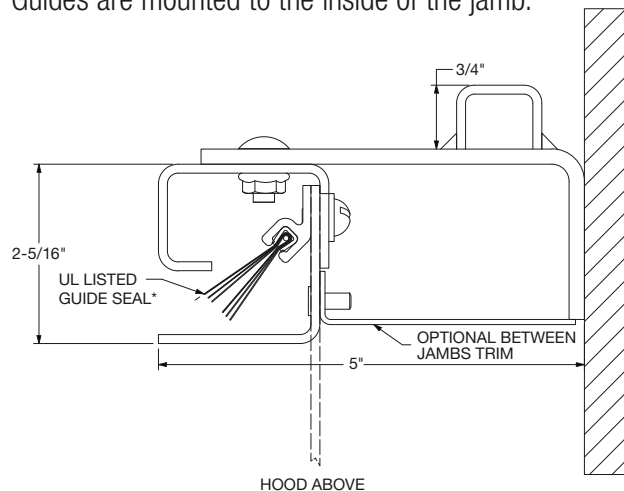


4" SHAFT FACE OF WALL

Guides are mounted to the interior or exterior side of the wall.

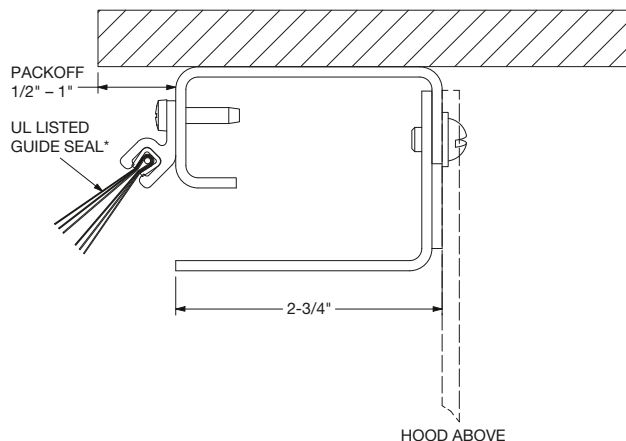

4" SHAFT BETWEEN JAMBS

Guides are mounted to the inside of the jamb.

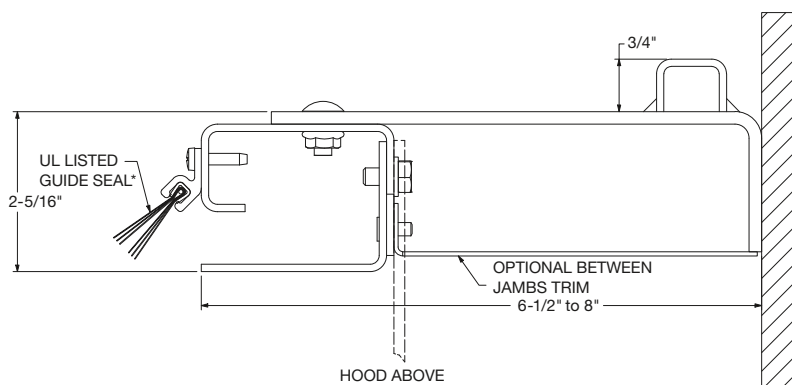

*The UL listed guide seal is standard on model CERC11 (SmokeShield®).

The details and dimensions on this sheet are provided as a rough guide for planning purposes.

CUSTOM-DESIGNED SOLUTIONS

Our experienced Architectural Design Support Team can customize our products to fit your specific application. at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.



CMDC-FRCSHUTTERD-23_REV1124